

1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2718 2719 2720 2721 2722 2723 2724 2725 2726 2727 2728 2729 2730 2731 2732 2733 2734 2735 2736 2737 2738 2739 2740 2741 2742 2743 2744 2745 2746 2747 2748 2749 2750 2751 2752 2753 2754 2755 2756 2757 2758 2759 2760 2761 2762 2763 2764 2765 2766 2767 2768 2769 2770 2771 2772 2773 2774 2775 2776 2777 2778 2779 2780 2781 2782 2783 2784 2785 2786 2787 2788 2789 2790 2791 2792 2793 2794 2795 2796 2797 2798 2799 2800 2801 2802 2803 2804 2805 2806 2807 2808 2

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:** Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Express Mail Label No.: EM432406808US

PTO/SB/17 (12/99)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL

for FY 2000

Patent fees are subject to annual revision.
Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.
See 37 C.F.R. §§ 1.27 and 1.28.

TOTAL AMOUNT OF PAYMENT (\$ 1286.00

Complete if Known

Application Number	
Filing Date	
First Named Inventor	Daniel SPTIZER
Examiner Name	
Group / Art Unit	
Attorney Docket No.	AC02733US

METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:

Deposit Account Number 01-1350

Deposit Account Name Akzo Nobel Inc.

☒ Charge Any Additional Fee Required
Under 37 CFR §§ 1.16 and 1.17

2. ☐ Payment Enclosed:

☐ Check ☐ Money Order ☐ Other

FEE CALCULATION**1. BASIC FILING FEE**

Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid
101 690	201 345	Utility filing fee	
106 310	206 155	Design filing fee	
107 480	207 240	Plant filing fee	
108 690	208 345	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$ 710.00

2. EXTRA CLAIM FEES

Total Claims	Extra Claims	Fee from below	Fee Paid
37	-20** = 17	X	306.00
3	-3** = -	X	-
Multiple Dependent			270.00

**or number previously paid, if greater; For Reissues, see below

Large Entity Small Entity

Fee Code	Fee Code	Fee Code	Fee Code	Fee Description
103 18	203 9			Claims in excess of 20
102 78	202 39			Independent claims in excess of 3
104 260	204 130			Multiple dependent claim, if not paid
109 78	209 39			** Reissue independent claims over original patent
110 18	210 9			** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$ 576.00

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Entity Fee Code	Small Entity Fee Code	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet.	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 380	216 190	Extension for reply within second month	
117 870	217 435	Extension for reply within third month	
118 1,360	218 680	Extension for reply within fourth month	
128 1,850	228 925	Extension for reply within fifth month	
119 300	219 150	Notice of Appeal	
120 300	220 150	Filing a brief in support of an appeal	
121 260	221 130	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,210	241 605	Petition to revive - unintentional	
142 1,210	242 605	Utility issue fee (or reissue)	
143 430	243 215	Design issue fee	
144 580	244 290	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 50	123 50	Petitions related to provisional applications	
126 240	126 240	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	
146 690	246 345	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 690	249 345	For each additional invention to be examined (37 CFR § 1.129(b))	

Other fee (specify) _____

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)

SUBMITTED BYName (Print/Type) Richard P. FennellySignature Richard P. FennellyRegistration No. (Attorney/Agent) 25,677**Complete (if applicable)**Telephone 914-674-5464Date OCT 5 2000**WARNING:**

Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

5 METHODS APPLYING COLOUR MEASUREMENT BY MEANS OF AN
ELECTRONIC IMAGING DEVICE

10 The invention pertains to methods applying colour measurement by means of
an electronic imaging device. More particularly, the invention pertains to a
method of determining a colour formula for matching a selected colour
measured with an electronic imaging device. The invention is also directed to a
method of determining a colour formula for matching a selected colour of a
textured material measured with an electronic imaging device. Finally, the
invention is directed to a method for checking a selected colour measured with
15 an electronic imaging device with a standard colour sample.

20 It is well-known to measure selected colours with the aid of colour meters, such
as spectrophotometers and tri-stimulus meters . The measured signals may be
used for the determination of a colour formula. Thus U.S. 4,813,000 discloses
measuring a selected colour with the aid of a tri-stimulus colour analyser and
using the measured chromaticity data to search for a colour formula in a
databank. A series of articles by W. R. Cramer published in *Fahrzeug +*
Karosserie, 9, 1997, 11-12, 1997, and 1-5, 1998, describes commercial
applications of measuring a selected colour with the aid of a spectrophotometer
25 and using the measured spectral data to search for a colour formula in a
databank. Such methods are especially suitable for use at points of sale where
paints have to be available in every colour.

30 It is also possible to use the measured signals to check the selected colour with
a standard colour sample. Such a method is currently used in the printing inks
industry.

35 The human eye is highly sensitive to colour differences. If a colour is to be
matched, it is essential that the measurement of the colour be as accurate as
possible. High measuring accuracy requires calibration. To this end there are

fixed standards defining colour in terms of standard values, so-called colorimetric data. Most common colorimetric data has been laid down by the Commission International de l'Eclairage (CIE), e.g., CIELab (L^*_{ab} , a^* , b^*), CIEXYZ (X, Y, Z), and CIELUV (L^*_{uv} , u^* , v^*). Spectral measuring data and tri-stimulus measuring data therefore have to be converted to colorimetric data if a spectrophotometer or a tri-stimulus meter is to be calibrated.

The drawback to spectrophotometers is that they are very delicate instruments. Hence a certain expertise is required on the part of the user which is not always available at the aforementioned points of sale. Moreover, spectrophotometers are expensive. A further drawback to spectrophotometers and tri-stimulus meters is that they cannot be used for measuring colour appearance including texture of the material.

The invention pertains to a method of determining a colour formula for matching a selected colour measured with an electronic imaging device, which method comprises the following steps:

- a) an electronic imaging device is calibrated by measuring the colour signals of at least two calibration colours, the colorimetric data of each of the calibration colours being known;
- b) at the same time or in a next step the selected colour is measured with the aid of the electronic imaging device;
- c) using a mathematical model, parameters are calculated for converting the measured colour signals of the calibration colours to the known colorimetric data;
- d) using the mathematical model and the calculated parameters, the colour signals of the measured selected colour are converted to colorimetric data; and
- e) using a databank, the colour formula is determined of which the colorimetric data most closely matches the calculated colorimetric data of the measured selected colour.

The invention has the advantage that it is possible to make use of inexpensive consumer electronics. Consumer electronics often do not have the accurate settings required for specialist applications. The method according to the invention now makes it possible to utilise an inaccurate device for the determination of a colour formula for matching a selected colour and yet achieve a high level of measuring accuracy. In addition, the method can be performed easily by a non-specialist without him needing extensive training. The method according to the invention also makes it possible to measure a specific attribute of the colour appearance, the so-called texture.

10

In the method according to the invention the term "electronic imaging device" stands for all devices with which an electronic image can be recorded that can be processed with the aid of a computer. Examples of such electronic imaging devices are digital recording devices. Preferably, the electronic imaging device is a digital video camera, a digital camera, a flatbed scanner, a drum scanner, or a manually operated scanner. However, an analogue video camera coupled to a so-called frame grabber which converts the analogue signal to a digital image is also covered by the term "electronic imaging device." Finally, the term "electronic imaging device" also covers multi-spectral-imaging equipment and monochrome cameras with multiple colour filters. Examples of flatbed scanners are the Hewlett Packard 3C, Hewlett Packard Scanjet IIc, Sharp JX450, Agfa Focus Color, and Agfa Arcus Plus. Examples of drum scanners are the Howtek D4000, Optronics Color Getter, and LeafScan 45. Examples of digital cameras are the Ricoh RDC 5000, Olympus C-2000Z, and Nikon Coolpix 950. Preferably, a digital camera is employed.

25

A minimum of two calibration colours is used, i.e. white and black. Optionally, use may be made of grey or neutral colours. For a more accurate conversion of the colour signals of the selected colour to colorimetric data preference is given to including calibration colours other than the neutral colours. The calibration colours may be selected at random. Preferably, use is made of calibration colours distributed over the entire colorimetric colour space. More preferably,

30

use is made of calibration colours distributed in the vicinity of the selected colour.

In theory, the physical calibration pattern can comprise as many calibration colours as may be present within the image field of the electronic imaging device. The calibration colours are recorded on the pattern in the form of patches. In theory, the calibration patches may have the size of a single pixel. In that case the size of the measuring surface will be equal to the size of the calibration patch. Depending on the electronic imaging device employed, phenomena may occur which require the calibration patch to be bigger than a single pixel. Such phenomena include stability, non-linearity, distortions, reproducibility of positioning, and cross-talk. Generally speaking, between 2 and 1000 calibration colours may be present, preferably 10-500, more preferably 25-150.

Of course, the calibration patches need not be square. Nor do they have to be rectangular or regularly shaped. There is no need to separate the colours, i.e. the colour is allowed to shift gradually.

The support on which the calibration patches are provided may be flat or curved. Preferably, the support is of uniform colour, e.g., white or grey. A clear space may be left around a portion or all of the calibration patches so as to leave the support's surface area visible. The uniform colour of the support may also serve to measure and correct any spatial non-uniformity of the electronic imaging device.

Depending on the measuring accuracy required, it may be preferred to measure the calibration colours and the selected colour simultaneously. In such cases the calibration pattern support may be provided with a recess, e.g., at the centre. Alternatively, a support may be selected which is smaller than the image field, so that the remaining image field can be used to record the selected colour.

Also, within the framework of the present invention it is possible to calibrate beforehand in step a) using a calibration pattern with more than 10 colours, then in step b) carry out a black and white calibration and measure the selected colour simultaneously. This combination of steps is useful in reducing the variation in brightness due to the influence of the light source.

Processing the recorded image, calculating the model parameters, and converting the measured colour signals to colorimetric data is all done by means of computer software. The software indicates the position of the calibration pattern and, optionally, the object to be measured. The software also includes a table listing known colorimetric data for each calibration colour and a mathematical model describing the correlation between the measured colour signals and the colorimetric data. With the aid of the software the model parameters are calculated from the mathematical model. The software then goes on to use the mathematical model and the model parameters to convert the measured signals of the selected colour to colorimetric data.

Colorimetric data may be exemplified by CIE systems such as Lab or XYZ. However, this term is not restricted to CIE systems. It may be possible to use user defined systems.

The mathematical model selected may be any model known to the skilled person. Examples are mentioned in H.R. Kang, *Color Technology for Electronic Imaging Devices*, SPIE Optical Engineering Press, 1997, chapters 3 and 11, and in U.S. 5,850,472. The model may be non-linear or linear. One example of a non-linear model is a 2nd order polynomial having 10 parameters or a 3rd order polynomial having 20 parameters. Preferably, use is made of a linear model. More preferably, the linear model used has 4 model parameters.

One example of a linear model having 4 parameters is the following model, where the measured colour signals of the calibration colours, in this case R, G, and B data, are converted to colorimetric data, in this case CIE Lab data:

$$L_i^* = c_0 + c_1 R_i + c_2 G_i + c_3 B_i,$$

$$a_i^* = d_0 + d_1 R_i + d_2 G_i + d_3 B_i,$$

$$b_i^* = e_0 + e_1 R_i + e_2 G_i + e_3 B_i,$$

wherein R_i , G_i , B_i , L_i^* , a_i^* , and b_i^* are the measured signals and the colorimetric data of calibration colour i .

5

Linear regression is used to calculate the model parameters c_0 - c_3 , d_0 - d_3 , and e_0 - e_3 from the measured RGB data and the known CIELab data of the calibration colours. These model parameters are used to convert the measured RGB data of the selected colour to CIELab data.

10

One example of a non-linear 3rd order polynomial having 20 parameters is:

$$L_i^* = c_0 + c_1 R_i + c_2 G_i - c_3 B_i + c_4 R_i^2 + c_5 G_i^2 + c_6 B_i^2 - c_7 R_i G_i - c_8 R_i B_i + c_9 G_i B_i + c_{10} R_i^3 + c_{11} G_i^3 + c_{12} B_i^3 + c_{13} R_i^2 G_i + c_{14} R_i^2 B_i + c_{15} G_i^2 R_i + c_{16} G_i^2 B_i + c_{17} B_i^2 R_i + c_{18} B_i^2 G_i + c_{19} R_i G_i B_i$$

15

$$a_i^* = d_0 + d_1 R_i + d_2 G_i - d_3 B_i + d_4 R_i^2 + d_5 G_i^2 + d_6 B_i^2 - d_7 R_i G_i - d_8 R_i B_i + d_9 G_i B_i + d_{10} R_i^3 + d_{11} G_i^3 + d_{12} B_i^3 + d_{13} R_i^2 G_i + d_{14} R_i^2 B_i + d_{15} G_i^2 R_i + d_{16} G_i^2 B_i + d_{17} B_i^2 R_i + d_{18} B_i^2 G_i + d_{19} R_i G_i B_i$$

$$b_i^* = e_0 + e_1 R_i + e_2 G_i - e_3 B_i + e_4 R_i^2 + e_5 G_i^2 + e_6 B_i^2 - e_7 R_i G_i - e_8 R_i B_i + e_9 G_i B_i + e_{10} R_i^3 + e_{11} G_i^3 + e_{12} B_i^3 + e_{13} R_i^2 G_i + e_{14} R_i^2 B_i + e_{15} G_i^2 R_i + e_{16} G_i^2 B_i + e_{17} B_i^2 R_i + e_{18} B_i^2 G_i + e_{19} R_i G_i B_i$$

20

Linear regression is used to calculate the model parameters c_0 - c_{19} , d_0 - d_{19} , and e_0 - e_{19} from the measured RGB data and the known CIELab data of the calibration colours. These model parameters are used to convert the measured RGB data of the selected colour to CIELab data.

25

Notwithstanding the above, it is possible to lend greater weight to the calibration colours in the vicinity of the selected colour when calculating the model parameters. In the case of the above example of a linear model having 4 parameters, this means that during the linear regression each calibration colour is given a weighing factor based on the distance in the RGB colour space between the calibration colour in question and the selected colour. In the linear regression procedure the following sum of squares is minimised:

30

$$\sum_{i=1}^n w_i (y_i - \hat{y}_i)^2$$

Written out, this sum is as follows:

$$\sum_{i=1}^n (L_i^* - c_0 - c_1 R_i - c_2 G_i - c_3 B_i)^2 ((R_i - R)^2 + (G_i - G)^2 + (B_i - B)^2)^{-2}$$

$$\sum_{i=1}^n (a_i^* - d_0 - d_1 R_i - d_2 G_i - d_3 B_i)^2 ((R_i - R)^2 + (G_i - G)^2 + (B_i - B)^2)^{-2}$$

$$5 \quad \sum_{i=1}^n (b_i^* - e_0 - e_1 R_i - e_2 G_i - e_3 B_i)^2 ((R_i - R)^2 + (G_i - G)^2 + (B_i - B)^2)^{-2}$$

wherein

n : is the number of calibration colours

R, G, B : are the measured signals of the selected colour

- 10 Alternatively, it is possible to use the calibration colours in the vicinity of the selected colour for interpolation.

- If so desired, grey balancing may be performed on the signals measured for black, white, and grey according to the formula $R=G=B=f(L^*)$ or a comparable value for L^* in a different colorimetric system. Such grey balancing is described in H.R. Kang, *Color Technology for Electronic Imaging Devices*, SPIE Optical Engineering Press, 1997, chapter 11. Examples of algorithms suitable for use are:

- 15 $R_{ig} = f_1 + f_2 \cdot L_{ig}^*$
 $R_{ig} = f_1 + f_2 \cdot L_{ig}^* + f_3 \cdot (L_{ig}^*)^2$
 $R_{ig} = f_1 + f_2 \cdot L_{ig}^* + f_3 \cdot \log(L_{ig}^*)$

wherein R_{ig} is the measured signal and L_{ig}^* is the colorimetric value of the white, grey, and black calibration colours.

- 25 Alternatively, if so desired, an offset correction of the measured data for black and white may be performed according to the following formula:

$$R_c = ((R - R_b) / (R_w - R_b)) \times 255$$

$$G_c = ((G - G_b) / (G_w - G_b)) \times 255$$

$$B_c = ((B - B_b) / (B_w - B_b)) \times 255$$

wherein

R_c, G_c, B_c = the corrected signals for the selected colour

R, G, B = the measured signals for the selected colour

R_w, G_w, B_w = the measured signals for white

5 R_b, G_b, B_b = the measured signals for black

In the final step of the method according to the invention a databank is used to determine a colour formula having colorimetric data most closely matching the calculated colorimetric data of the measured selected colour. One measure of the colour difference between the colour formula and the selected colour is, e.g., the following mathematical algorithm:

$$\Delta E^*_{ab} = \sqrt{((\Delta L^*)^2 + (\Delta a^*)^2 + (\Delta b^*)^2)}$$

wherein

ΔE^*_{ab} is the colour difference according to CIE

15 $\Delta L^* = L^*_1 - L^*_2$

$\Delta a^* = a^*_1 - a^*_2$

$\Delta b^* = b^*_1 - b^*_2$

1 = the calculated colorimetric data of the selected colour

2 = the colorimetric data of the colour formula from the databank

20 The smaller the colour difference ΔE^*_{ab} is, the better the match between the selected colour and the colour formula will be.

Colour formulas can be determined in a number of ways, i.e. by means of search procedures, calculations, or combinations of the two. For example, use may be made of a databank comprising colour formulas having colorimetric data linked thereto. Using the calculated colorimetric data of the measured selected colour, the most closely matching colour formula can be found. Alternatively, it is possible to use a databank having colour formulas with spectral data linked thereto. Known calculation methods can be used to calculate the colorimetric data of the colour formulas and compare them. Also, a databank can be used in which the absorption and reflection data, the so-called

K and S data, of pigments are stored. Using K and S data in combination with pigment concentrations makes it possible to calculate the colour formula of which the colorimetric data most closely match the colorimetric data of the measured selected colour. The methods in question have been described in
5 detail in D.B. Judd et al., *Color in Business, Science and Industry*. It is possible to combine the aforesaid search and calculation methods.

Phenomena such as light source metamerism, angular metamerism, and texture will affect the colour matching.

10

Light source metamerism is a phenomenon where under a single light source, e.g., daylight, the observed colours of two objects may be the same visually, while under some other light source, e.g., fluorescent light, the colours differ. This can be taken into account by measuring under two light sources with
15 different emission spectra. In the method according to the invention, advantageous use is made of an electronic imaging device, with recordings being made of the selected colour and the calibration colours under different light sources. The software needed to process different measurements of the same object is known to the skilled person.

20

Textured materials, such as metallic and pearlescent paints, are characterised in that the appearance of the colour changes as the angle of observation and/or exposure angle changes (angular metamerism). For proper measurement of such colours it is therefore essential to determine the colour at at least two
25 different angles. In this process it is advantageous to make use of the method according to the invention. An electronic imaging device makes it possible to measure the colour of an object in any one of the following ways or combinations thereof:

- At least two recordings are made with the electronic imaging device while
30 the object moves within the image field of the device ;
- At least two recordings are made with the electronic imaging device while the device moves vis-à-vis the object;

- At least two recordings are made with the electronic imaging device while a light source is moved vis-à-vis the object; or
- One recording is made with the electronic imaging device of a flat or curved section of the object when the device is able to discriminate in a single image between data at different angles.

5

The software required to process different measurements of the same object is known to the skilled person.

Another characteristic of materials, such as special effect paints, is texture.

10

Texture can be defined as an arrangement of small areas having a specific colour and/or shape. It was found that by using image processing methods known as such the texture of a special effect paint can be determined from recordings made with an electronic imaging device. One way of characterising texture is by means of texture parameters. Commercially available image processing packages, e.g., "Optimas," make it possible to calculate such texture parameters using the recording. An example of such calculations is given below. Needless to say, said example should not be construed as limiting the present invention in any way.

15

20

The recording of the measured selected colour is used to determine the average brightness. Selected are areas in the recording which have much higher than average brightness. If so desired, it can be determined which areas overlap or adjoin and to separate those areas using software. Each selected area has its circumference and surface area calculated. This gives the average circumference, the average surface area, and the accompanying standard deviations for the measured selected colour. Optionally, calculations such as averaging and filtering pixels and/or pixel groups may also be included.

25

30

If so desired, the texture measurement can be calibrated by applying one or more rulers to the calibration pattern.

For matching textured materials such as special effect paint, the method according to the invention provides the possibility of linking the colour formulas

- in a databank not only to colorimetric data but also to texture parameters or recordings from which texture parameters can be calculated. Using these parameters or recordings the colour formula most closely matching the selected colour also in terms of texture can be found in the databank. One example of an
- 5 algorithm for finding the most closely matching colour formula which is also closest to the selected colour in terms of texture is as follows:

$$\Delta T = \sqrt{w_1 \Delta T_1^2 + w_2 \Delta T_2^2 + K + w_i \Delta T_i^2}$$

wherein

w_{1-i} = weighing factors

- 10 T_{1-i} = texture parameters

It is also possible to calculate an overall parameter, e.g. $\Delta Q = f(\Delta E, \Delta T)$.

- The method according to the invention can be applied at points of sale which have to be able to supply paint in any colour desired. A colour formula is made
- 15 up of quantities of mixing colours, master paints and/or pigment pastes. Using the colour formula, the paint can be prepared in a dispenser. In the car repair sector it is customary to employ a set of mixing colours standardised for colour and colour strength. These standardised mixing colours, usually about 40
- 20 different colours, are present at the points of sale. From this set of standardised mixing colours any colour of paint desired can be made. In the DIY sector as well as the professional painting industry it is customary to use a set of master paints standardised for colour which often consists of at least one white and/or one clear master colour, i.e. a paint without pigment, optionally supplemented
- 25 with master paints in a number of different colours, and pigment pastes standardised for colour and colour strength. From this set of master paints any colour desired can be made by adding pigment pastes to the master paint.

- The present invention can be used with advantage in the car repair industry. In that case, the method may be carried out as follows. The colour of a car to be
- 30 repaired is measured using an electronic imaging device. Prior to this or at the same time, a recording is made of a panel on which different calibration colours have been applied. The colorimetric data of the car's colour is calculated.

Software is used to generate the colour formula which after application will give a colour identical to the colour of the car to be repaired. The colour formula is prepared in a dispenser and applied.

- 5 As stated above, it may be advantageous to perform the calibration colours measurement simultaneously with the measurement of the selected colour. This is the case for instance in the car auto repair industry, where a measuring accuracy of a ΔE^*_{ab} smaller than 1 is required. In that case the method can be carried out such that in one image both a section of the car and the panel with
- 10 the calibration colours are measured. The process does not require that the calibration panel is actually positioned on the car. It may be mounted somewhere else, providing it is in the same image field as the car during the recording.
- 15 Optionally, other information may be provided to be recorded with the electronic imaging device. For example, when several patterns are used, a code may be provided on every pattern. When the method of the invention is used in the car industry, information may be provided with regard to the type of car, its year of manufacturing, and other relevant information. This information may be
- 20 provided in the form of bar codes, dot codes, or alpha-numerical information. A space may be provided on the calibration pattern for this kind of information. However, it is also possible to provide this information at any other place in the body shop as long as it is in the same image field as the car.
- 25 Since it has now proved possible to also measure the texture of an object with an electronic imaging device, the invention also comprises a method of determining a colour formula for matching a selected colour of textured materials such as special effect paints in which
- 30 a) the selected colour is measured with a spectrophotometer or tri-stimulus meter;
- b) the texture of the selected colour is measured with an electronic imaging device; and

c) the measured colour and texture signals are used to determine, in a databank, the colour formula of which the colorimetric data and the texture parameters most closely match those of the selected colour.

- 5 It is well-known to use a spectrophotometer for measuring a selected colour of a special effect paint and use the spectral measuring data to find the colour formula most closely matching the selected colour in a databank. Such databanks often will have a texture parameter linked to the colour formula, i.e. coarseness, frequently expressed in a numerical range, such as from 0 to 10.
- 10 This parameter is indicated by the user, who with the aid of swatches will determine the coarseness of the special effect paint at sight. Using a method according to the invention, it is now possible to determine the texture electronically, convert it to a coarseness value, and use this value to find a colour formula in an existing databank which most closely matches the selected
- 15 colour.

Alternatively, of course, databanks can be adapted or new ones set up in which new texture parameters or recordings are linked to colour formulas.

- 20 Since special effect paints are used primarily on cars, the above methods are preferably used in the car repair industry.

Finally, the invention pertains also to a method of determining the colour difference of a selected colour measured with an electronic imaging device compared to a standard colour sample, which method comprises the following

25 steps:

- a) an electronic imaging device is calibrated by measuring the colour signals of at least two calibration colours, the colorimetric data of each of the calibration colours being known;
- 30 b) at the same time or in a next step the selected colour is measured with the aid of the electronic imaging device;

- c) using a mathematical model, parameters are calculated for converting the measured colour signals of the calibration colours to the known colorimetric data;
 - d) using the mathematical model and the calculated parameters, the colour signals of the measured selected colour are converted to colorimetric data; and
 - e) the colorimetric data of the selected colour are compared to the colorimetric data of a standard colour sample.
- 5
- 10 The colorimetric data of the standard colour sample can be available in a software program. It is also possible to measure the standard colour sample before, simultaneously, or after the measurement of the selected colour. This method is preferably used in the printing inks industry.
- 15 All three methods of the present invention are not restricted to but are preferably used in the paint or printing inks industry.

The invention will be elucidated with reference to the following examples.

Examples

The measurements in these examples were performed using two different calibration patterns, both on an A4-size support. The calibration colours of the two calibration patterns first had their colorimetric data determined with the aid of spectrophotometers:

Calibration pattern 1 (see figure 1):

- 65 calibration colours distributed over the entire colour space
- The colours are from the Sikkens 3031 Color Collection

The L^* , a^* , and b^* data of the 65 calibration colours were measured with the HunterLab UltraScan spectrophotometer with D/8 geometry. The L^* , a^* , and b^* (daylight D65, 10°-observer) data is listed in Table 1.

Calibration pattern 2 (see figure 2):

- 37 calibration colours distributed over part of the colour space ($0 < a^* < 50$; $0 < b^* < 50$; $15 < L^* < 65$). The neutral colours (white/ grey/ black) are present in duplicate (colour nos. 1, 2, 6, 7, 8, 13, 14, 15, 18, and 19).
- The colours are selected from the Sikkens Car Refinishes Color Map (Autobase colours)

The 37 calibration colours were measured with different spectrophotometers, among others the Macbeth CE 730-GL, at three angles, 45/0, 45/20, and 45/-65 geometry. The spectral data was transformed mathematically to D/8 geometry. The calculated L^* , a^* , and b^* (scanner light source of the Hewlett Packard Scanjet 5P flatbed scanner, 10°-observer) data is listed in Table 2.

Example 1

- A Hewlett Packard 3C flatbed scanner was used to measure the colour of calibration pattern 1 and 149 unknown colours. The method involved each unknown colour being measured simultaneously with the calibration pattern.

The result of the measurements in other words was 149 colour images of calibration pattern 1, each time with one of the 149 unknown colours in the position of the unknown colour (see pattern 1, "unknown"). Using the linear model with 4 parameters and the weighing algorithm as described above, the colorimetric data of the 149 unknown colours was calculated.

In addition, the colorimetric data of the 149 unknown colours was measured with the aforesaid Hunterlab Ultrascan spectrophotometer with D/8 geometry (daylight D65, 10°-observer).

Table 3 presents a survey of the data. Columns 2-4 list the colorimetric data as measured with the spectrophotometer, columns 5-7 list the colorimetric data as measured using the scanner, and column 8 lists the colour differences between the spectrophotometer and the scanner colorimetric data. On average, the colour difference $\Delta E_{ab}^* = 2,26$. The median of the colour difference $\Delta E_{ab}^* = 1,67$. The ΔE_{ab}^* 's are also listed in Table 4.

Example 2

Example 1 was repeated, except that the measurement of the calibration pattern took place beforehand. In other words, the outcome of the measurements was one recording of calibration pattern 1 and 149 recordings of the unknown colours without calibration pattern 1.

A survey of the results is also to be found in Table 3. Columns 9-11 list the colorimetric data as determined with the scanner. Column 12 lists the colour difference between the colorimetric data determined with the spectrophotometer and those determined with the scanner. On average, the colour difference $\Delta E_{ab}^* = 2,23$. The median of the colour difference $\Delta E_{ab}^* = 1,61$. The ΔE_{ab}^* 's are also listed in Table 4.

Examples 3 and 4

Examples 1 and 2 were repeated, except that also grey balancing was performed using the following algorithm $R_{ig} = f_1 + f_2 \cdot L_{ig}^*$. The results are listed in Table 4.

5

Example 5

Example 1 was repeated, except that there was no weighing. The results are listed in Table 4.

10 Example 6

Example 5 was repeated, except that use was made of the model with 20 parameters as described in the text. The results are listed in Table 4.

Discussion of Examples 1-6

- 15 As is clear from Table 4, Examples 1-6 show that good results can be obtained using the method according to the invention. Depending on the required accuracy, it is possible to choose among the different algorithms. It is clear from Examples 5 and 6 that a method according to the invention can be performed by simultaneously calibrating and employing a model with 4 or 20 parameters.
- 20 Also, it is shown in Examples 1-2 and 3-4 that there is hardly any difference between calibrating beforehand and simultaneous calibration. This is probably the result of a combination of factors, i.e. the use of the calibration pattern with 65 colours, the mathematical model, and the Hewlett Packard 3C flatbed scanner. It is expected that a change of one or more of these factors will show
- 25 better results in the simultaneous calibration than in calibrating beforehand.

Example 7

- Using a Hewlett Packard Scanjet 5P flatbed scanner, the colour was measured of calibration pattern 2 and 28 unknown colours, in each case with the unknown
- 30 colour being measured simultaneously with the calibration pattern. The result of the measurements thus was 28 colour images of calibration pattern 2, each time with one of the 28 unknown colours in the position of the unknown colour (see pattern 2, "unknown"). Using the linear model with 4 parameters and the

weighing algorithm as described in the text above, the colorimetric data of the 28 unknown colours was calculated.

In addition, the colorimetric data of the 28 unknown colours was calculated by measuring the colours with the aid of a MacBeth CE 730-GL spectrophotometer, at three angles, 45/0, 45/20, and 45/-65 geometry (scanner light source of the Hewlett Packard Scanjet 5P flatbed scanner, 10°-observer) and transforming the spectral data mathematically to D/8 geometry.

Table 5 presents a survey of the measuring data. Columns 2-4 list the colorimetric data as measured with the spectrophotometer, columns 5-7 list the colorimetric data as measured with the scanner, and column 8 lists the colour differences between the spectrophotometer and the scanner colorimetric data. On average, the colour difference $\Delta E_{ab}^* = 2,20$. The median of the colour difference $\Delta E_{ab}^* = 2,04$. The ΔE_{ab}^* 's are also listed in Table 6.

Example 8

Example 7 was repeated, except that the measurement of the calibration pattern took place beforehand. The outcome of the measurements, in other words, was one recording of calibration pattern 2 and 28 recordings of the unknown colours without calibration pattern 2.

A survey of the results is also to be found in Table 5. Columns 9-11 list the colorimetric data as determined with the scanner. Column 12 lists the colour difference between the colorimetric data determined with the spectrophotometer and those determined with the scanner. On average, the colour difference $\Delta E_{ab}^* = 2,24$. The median of the colour difference $\Delta E_{ab}^* = 2,18$. The ΔE_{ab}^* 's are also listed in Table 6.

Examples 9 and 10

Examples 7 and 8 were repeated, except that also grey balancing was performed using the following algorithm $R_{ig} = f_1 + f_2 \cdot L_{ig}^*$. The ΔE_{ab}^* 's are listed in Table 6.

5

Example 11

Example 7 was repeated, except that there was no weighing. The ΔE_{ab}^* 's are listed in Table 6.

10 Example 12

Example 11 was repeated, except that use was made of the model with 20 parameters as described in the text. The ΔE_{ab}^* 's are listed in Table 6.

Discussion of Examples 7-12

- 15 As is clear from Table 6, Examples 7-12 show that good results can be obtained using the method according to the invention. Depending on the required accuracy, it is possible to choose among the different algorithms. It is clear from Examples 11 and 12 that a method according to the invention can be performed by simultaneously calibrating and employing a model with 4 or 20 parameters.
- 20 Also, it is shown in Examples 7-8 and 9-10 that there is hardly any difference between calibrating beforehand and simultaneous calibration. This is probably the result of a combination of factors, i.e. the use of the calibration pattern with 37 colours, the mathematical model, and the Hewlett Packard Scanjet 5P flatbed scanner. It is expected that a change of one or more of these factors will
- 25 show better results in the simultaneous calibration than in calibrating beforehand.

Example 13: Reproducibility

- 30 One of the 65 calibration patches of pattern 1 (no. 8) was designated as an unknown colour. The colorimetric data of the selected colour was $L^*=36,56$; $a^*=56,40$; and $b^*=42,10$.

Calibration patch 8 was measured 149 times with the Hewlett Packard 3C flatbed scanner, simultaneously with the 64 known calibration colours. The standard deviation in ΔE^*_{ab} measured over the 149 measuring points was 0,35, which is comparable with the result for a spectrophotometer.

Example 14: Reproducibility

One of the 37 calibration patches of pattern 2 (no. 26) was designated as an unknown colour. The colorimetric data of the selected colour was $L^*=34,29$; $a^*=37,55$; and $b^*=33,64$.

Calibration patch 26 was measured 28 times with the Hewlett Packard 3C flatbed colours scanner, simultaneously with the 36 known calibration patches. The standard deviation of ΔE^*_{ab} measured over the 28 measuring points was 0,17, which is of the same order of magnitude as when a spectrophotometer is used.

Table 1

Colorimetric data of calibration pattern 1 measured with the Hunterlab spectrophotometer (daylight D65, 10°-observer)

5

Calibration patch	Measured data (CIE)		
	L*	a*	b*
1	23,67	31,31	10,69
2	56,60	34,49	13,98
3	50,48	46,72	18,74
4	46,72	53,20	23,01
5	18,33	13,52	8,22
6	39,86	43,11	30,76
7	34,44	46,89	35,06
8	36,56	56,40	42,10
9	39,04	57,47	45,18
10	35,57	32,99	31,27
11	75,67	20,82	29,39
12	57,50	43,64	62,68
13	45,90	18,78	39,32
14	33,76	7,97	17,87
15	70,84	31,22	92,17
16	89,07	5,42	21,46
17	46,29	9,96	46,57
18	68,95	16,82	80,15
19	40,73	3,70	21,99
20	75,78	11,24	91,04
21	85,14	3,28	57,41
22	87,63	8,71	2,00
23	84,96	7,26	12,81
24	90,59	-0,42	6,25
25	89,13	-1,27	1,02
26	88,89	-7,82	-1,62
27	85,73	1,84	-8,11
28	29,52	6,54	0,72
29	21,56	2,52	4,84
30	36,55	0,89	7,92
31	60,78	-3,08	6,28
32	95,23	-0,91	0,93
33	24,68	-6,48	1,02
34	80,28	-0,13	0,06
35	60,92	-0,20	0,27
36	23,45	-0,45	-0,73
37	30,50	0,26	-0,01
38	16,97	0,31	1,37
39	64,60	1,22	67,45
40	27,26	-4,14	20,17
41	54,33	-14,23	51,54

Calibration patch	Measured data (CIE)		
	L*	a*	b*
42	85,41	-14,22	26,69
43	60,75	-12,09	15,68
44	12,02	-0,39	-0,62
45	48,45	-24,08	29,04
46	27,35	-8,37	8,95
47	79,80	-12,99	14,65
48	63,89	-41,61	38,05
49	35,93	-13,81	8,00
50	40,96	-34,26	11,19
51	35,75	-38,78	0,48
52	55,84	-19,84	-5,48
53	26,09	-9,59	-5,56
54	18,92	-8,61	-8,01
55	74,36	-14,83	-15,11
56	46,17	-29,05	-25,64
57	15,61	-6,47	-10,57
58	57,39	-10,71	-17,84
59	35,59	-12,07	-29,64
60	34,45	-12,38	-37,92
61	43,42	-4,46	-22,82
62	34,21	-0,57	-34,86
63	46,34	7,69	-32,94
64	65,16	15,14	-7,60
65	43,99	22,89	-14,27

Table 2

Colorimetric data of calibration pattern 2 measured with a spectrophotometer (scanner light source of the Hewlett Packard Scanjet 5P flatbed scanner, 10°-observer)

5

Calibration patch	Measured data (CIE)		
	L*	a*	b*
1	17,00	-0,07	-0,34
2	26,13	-0,04	-0,20
3	59,55	6,39	43,02
4	44,03	7,81	44,48
5	40,03	8,02	27,87
6	62,52	-0,50	-0,25
7	42,18	0,09	-0,21
8	17,00	-0,07	-0,34
9	59,01	9,63	26,03
10	29,16	8,09	21,43
11	38,01	30,08	35,37
12	39,96	8,00	35,05
13	87,99	-0,35	-0,08
14	26,13	-0,04	-0,20
15	42,18	0,09	-0,21
16	57,48	20,93	39,01
17	45,24	22,82	39,82
18	62,52	-0,50	-0,25
19	87,99	-0,35	-0,08
20	28,77	21,89	23,23
21	39,85	41,15	41,44
22	39,16	25,28	24,48
23	61,21	22,30	22,38
24	59,28	42,37	39,71
25	24,05	7,78	9,13
26	34,29	37,55	33,64
27	44,14	42,56	26,06
28	54,09	42,16	25,65
29	40,45	9,54	6,44
30	58,95	8,08	7,83
31	28,76	43,21	23,63
32	22,42	24,71	9,62
33	40,61	27,92	9,67
34	25,48	39,71	9,94
35	56,69	26,87	6,45
36	43,08	40,55	4,95
37	57,23	41,44	7,64

030307 " 630306"

Table 3
Measuring data of Examples 1 and 2

	Colorimetric data measured with a spectrophotometer			Simultaneous measuring and calibration				Calibration precedes measuring			
Colour	L*-ref	a*-ref	b*-ref	L*-real	a*-real	b*-real	ΔE^*_{ab} - real	L*-sing	a*-sing	b*-sing	ΔE^*_{ab} - sing
1	49,71	6,26	0,11	50,63	6,92	0,86	1,36	50,63	6,92	0,86	1,36
2	13,27	5,73	2,18	15,40	3,76	3,42	3,15	15,19	3,74	3,32	2,99
3	12,29	17,25	2,74	17,00	18,13	8,93	7,82	15,82	17,62	7,81	6,19
4	75,11	8	3,69	75,84	8,14	4,54	1,13	75,70	7,90	4,81	1,27
5	43,97	51,03	15,41	43,88	51,53	13,73	1,75	43,23	50,34	12,91	2,70
6	17,4	24,77	10,24	21,85	30,74	19,46	11,85	21,35	29,57	18,16	10,07
7	25,19	42,36	21,41	29,51	43,82	30,29	9,99	28,22	42,74	28,54	7,75
8	21,8	2,56	1,53	21,47	3,12	4,07	2,62	21,19	3,35	4,51	3,14
9	15,25	15,84	7,62	17,29	13,49	9,31	3,54	16,45	12,63	7,73	3,43
10	34,81	48,8	29,69	36,16	49,38	33,94	4,50	36,27	48,40	32,83	3,49
11	28,71	49,11	30,31	32,81	49,99	37,88	8,65	31,85	48,86	35,69	6,23
12	22,61	27,71	19,84	22,38	26,01	19,17	1,84	21,21	25,84	17,42	3,36
13	28,01	32,31	23,89	26,97	31,06	23,97	1,63	26,25	29,93	22,82	3,15
14	33,22	50,72	37	33,93	51,63	39,50	2,75	33,00	50,40	37,51	0,64
15	82,74	3,55	3,88	83,33	4,56	5,40	1,92	82,89	4,56	5,76	2,14
16	60,42	24,02	22,39	59,17	25,76	19,18	3,86	58,93	24,67	18,77	3,97
17	45,95	24,87	24,61	46,37	24,88	27,82	3,24	45,88	23,54	26,66	2,44
18	43,89	40,09	38,78	48,04	40,80	51,49	13,39	47,48	39,41	50,14	11,93
19	92,39	1,06	3,49	93,71	0,91	2,93	1,44	92,99	1,08	3,31	0,62
20	89,56	4,09	6,44	89,97	4,39	6,68	0,56	89,66	3,98	6,58	0,21
21	86,08	6,9	7,99	86,57	7,62	9,67	1,90	86,23	7,17	9,54	1,58
22	22,57	4,8	6,06	22,31	4,82	7,16	1,14	22,26	4,76	6,96	0,95
23	45,1	7,29	7,86	45,77	7,06	6,39	1,63	45,43	6,42	6,48	1,67
24	75,62	11,53	12,94	75,48	11,59	12,55	0,42	75,12	10,78	12,20	1,17
25	20,1	10,87	10,38	21,58	11,03	11,66	1,96	20,87	10,12	10,39	1,08
26	54	22,28	26,15	55,73	22,25	28,69	3,07	55,44	20,63	27,75	2,72
27	27,56	15,78	18,83	29,02	14,97	21,38	3,05	28,33	14,92	20,43	1,98
28	71,6	4,45	6,08	71,62	4,10	5,75	0,48	71,15	3,60	5,88	0,98
29	88,36	5,09	7,67	88,92	5,33	9,50	1,93	88,52	5,08	9,14	1,48
30	66,31	8,14	11,37	66,53	7,89	11,49	0,35	66,26	7,04	11,45	1,10
31	80,62	12,48	16,75	80,91	12,77	17,68	1,02	80,77	11,85	17,29	0,84
32	8,42	0,57	-0,11	13,47	-0,12	0,05	5,10	12,91	0,16	-0,24	4,51
33	52,34	2,7	5,87	53,51	2,96	6,10	1,23	53,31	2,18	6,31	1,19
34	34,61	6,16	11,87	35,29	6,25	14,68	2,89	35,26	5,53	14,81	3,08
35	27,7	13,56	22,8	29,83	13,66	24,38	2,65	29,47	13,08	23,47	1,95
36	56,51	9,55	21,34	56,69	9,46	19,03	2,32	56,61	9,41	18,95	2,40
37	25,48	1,29	4,75	24,42	1,29	5,55	1,33	24,28	0,82	6,06	1,84
38	80,87	4,88	14,71	81,05	5,35	15,48	0,92	80,71	5,04	15,45	0,77
39	64,96	8,09	23,33	65,17	8,23	22,80	0,58	65,05	7,65	22,88	0,64
40	70,72	13,31	42,15	70,81	12,61	41,30	1,10	70,78	11,54	40,89	2,17
41	51,9	18,98	54,91	53,83	18,12	62,24	7,63	53,87	17,18	62,55	8,09
42	65,68	2,34	9,17	66,02	2,31	9,82	0,73	65,89	1,95	10,19	1,11
43	52,47	2,46	9,1	52,56	2,64	7,81	1,30	52,82	1,95	8,09	1,19
44	89,61	4,12	14,61	90,63	4,20	17,04	2,63	90,35	3,87	16,42	1,98
45	84,56	7,7	26,01	84,59	7,69	26,57	0,56	84,36	7,03	25,77	0,74
46	89,79	0,81	5,19	90,27	0,74	5,92	0,87	89,78	0,97	5,96	0,79

Colour	Colorimetric data measured with a spectrophotometer			Simultaneous measuring and calibration			$\Delta E^*_{ab} -$ real	Calibration precedes measuring			$\Delta E^*_{ab} -$ sing
	L*-ref	a*-ref	b*-ref	L*-real	a*-real	b*-real		L*-sing	a*-sing	b*-sing	
47	76,67	1,44	9,09	77,02	1,49	9,27	0,40	76,42	1,33	9,33	0,36
48	45,51	1,92	9,69	46,29	2,17	8,23	1,67	45,81	1,51	8,62	1,19
49	81,64	4,39	21,07	82,05	4,51	21,75	0,80	81,61	4,15	21,33	0,35
50	81,88	1,99	11,52	82,04	1,83	11,48	0,23	81,44	1,68	11,41	0,55
51	70,97	1,77	18,31	71,40	1,77	18,76	0,62	71,19	1,20	18,94	0,87
52	80,28	2,62	20,73	80,64	2,57	21,40	0,76	80,10	2,34	21,11	0,51
53	85,34	2,93	22,93	85,92	2,59	24,07	1,32	85,68	2,11	23,30	0,97
54	65,59	5,37	49,99	66,54	5,22	55,36	5,45	66,52	4,23	55,48	5,69
55	54,62	7,61	54,69	52,93	8,17	59,01	4,67	53,21	6,95	59,06	4,64
56	70,45	1,02	42,48	71,84	1,05	43,87	1,97	71,84	0,07	43,51	1,98
57	89,88	0,18	9,66	90,55	-0,04	10,52	1,11	90,15	0,15	10,16	0,57
58	88,51	0,77	13,07	89,11	0,70	14,58	1,63	88,63	0,59	13,95	0,91
59	77,02	-0,37	14,1	77,40	-0,19	14,30	0,46	76,71	-0,51	14,13	0,34
60	46,16	-0,62	20,09	46,11	-0,19	19,42	0,80	45,81	-0,92	19,70	0,60
61	78,14	-1,25	30,03	79,29	-1,13	31,39	1,78	78,76	-1,52	30,90	1,10
62	92,66	-0,15	8,14	94,21	-0,12	8,50	1,59	93,93	0,12	8,62	1,38
63	85,33	-0,16	10,42	85,99	-0,05	11,57	1,33	85,65	-0,12	11,68	1,30
64	66,7	-1,31	11,69	66,72	-1,12	12,70	1,03	66,81	-1,49	13,05	1,37
65	55,97	-1,72	9,92	56,88	-1,59	9,68	0,95	56,67	-2,35	10,19	0,98
66	45,98	-6,41	28,68	45,07	-5,61	27,82	1,48	45,32	-6,51	29,05	0,77
67	87,22	-1,25	4,43	87,59	-1,36	4,86	0,58	87,10	-1,28	4,92	0,51
68	52,72	-1,9	5,23	53,73	-1,43	5,22	1,11	53,32	-2,10	5,69	0,78
69	71,08	-1,71	5,96	71,36	-1,46	5,91	0,38	70,86	-1,95	6,30	0,47
70	30,92	-2,65	8,69	30,90	-3,12	9,87	1,27	30,76	-3,57	9,93	1,55
71	35,23	-7,34	28,35	36,88	-8,86	30,92	3,41	36,96	-9,49	31,81	4,42
72	55,65	-5,3	9,65	56,01	-5,30	8,96	0,78	55,73	-5,89	9,53	0,61
73	66,67	-5,66	9,97	66,01	-5,67	10,96	1,19	66,06	-6,09	11,48	1,68
74	75,32	-6,33	11,78	74,95	-5,62	10,93	1,17	74,20	-5,61	11,10	1,49
75	85,09	-7,32	12,63	85,21	-7,00	12,84	0,40	84,45	-6,65	13,03	1,01
76	35,1	-7,84	15,88	34,77	-9,59	16,72	1,97	34,65	-10,40	17,03	2,84
77	83,16	-4,27	6,37	84,00	-4,35	7,25	1,22	83,26	-4,15	7,53	1,17
78	57,75	-4,28	6,42	58,14	-3,93	6,13	0,60	57,86	-4,41	6,64	0,28
79	43,77	-2,11	2,4	44,83	-0,79	2,25	1,70	43,86	-1,77	2,16	0,43
80	62,94	-17,03	21,53	62,46	-17,78	18,89	2,78	61,96	-18,20	19,95	2,20
81	92,95	-1,12	1,25	95,73	-0,68	1,26	2,82	94,11	-0,53	1,94	1,47
82	85,51	-10,69	10,42	86,08	-10,21	11,20	1,07	85,06	-9,66	11,58	1,62
83	71,5	-13,48	12,33	70,53	-13,50	10,96	1,68	69,83	-13,62	11,40	1,92
84	48,62	-15,07	12,12	48,97	-13,92	8,73	3,59	48,42	-14,40	9,43	2,78
85	40,29	-19,75	15,51	39,53	-21,46	16,39	2,07	39,63	-21,59	17,19	2,58
86	36,69	-31,82	23,66	36,32	-36,81	23,26	5,02	36,05	-36,72	24,58	5,03
87	46,08	-2,07	1	47,04	-1,10	0,13	1,61	46,37	-1,81	0,36	0,75
88	92,14	-4,27	3,62	93,42	-3,80	3,86	1,38	92,36	-3,44	3,99	0,93
89	64,1	-9,61	6,11	63,08	-9,95	6,58	1,17	62,78	-10,46	6,86	1,74
90	77,38	-11,04	7,27	76,38	-9,96	6,19	1,83	76,10	-9,60	6,46	2,09
91	84,65	-13,66	8,73	84,28	-13,15	8,43	0,70	84,55	-13,32	8,46	0,44
92	20,03	-13,51	6,95	21,05	-10,84	6,42	2,91	20,82	-11,13	6,60	2,53
93	16,47	-5,88	3,55	17,88	-4,26	3,74	2,15	17,66	-4,44	3,93	1,91
94	80,15	-7,24	3,29	80,35	-6,80	3,18	0,50	80,13	-6,37	3,79	1,01
95	25,92	-26,75	8,14	27,34	-23,30	10,41	4,37	26,58	-23,45	11,21	4,56
96	24,78	-20,28	10,67	26,14	-18,20	11,50	2,62	25,83	-18,15	12,42	2,95

Colour	Colorimetric data measured with a spectrophotometer			Simultaneous measuring and calibration			$\Delta E^*_{ab} -$ real	Calibration precedes measuring			$\Delta E^*_{ab} -$ sing
	L*-ref	a*-ref	b*-ref	L*-real	a*-real	b*-real		L*-sing	a*-sing	b*-sing	
97	19,87	-17,69	1,36	20,96	-13,31	2,93	4,78	20,71	-13,05	3,23	5,07
98	34,47	-1,78	0,06	33,29	-1,45	0,53	1,31	33,10	-1,85	0,77	1,54
99	66,95	-11,78	0,9	67,00	-11,22	0,70	0,59	67,06	-11,41	1,24	0,52
100	84,68	-14,11	0,5	85,61	-13,50	1,06	1,25	85,17	-12,97	1,53	1,61
101	15,57	-8,82	1,1	17,33	-5,54	1,67	3,77	17,38	-5,57	2,50	3,97
102	66,63	-21,42	1,1	65,80	-20,16	-0,44	2,16	65,70	-20,45	0,43	1,51
103	74,69	-24,05	0,99	73,40	-22,97	-0,51	2,26	73,02	-22,85	0,50	2,11
104	50,57	-8,52	-1,31	51,47	-6,93	-1,28	1,83	50,98	-7,34	-0,79	1,35
105	24,96	-21,45	-3,88	25,48	-17,88	-1,52	4,31	24,87	-18,89	-0,99	3,86
106	89,5	-8	-0,03	89,91	-7,90	0,01	0,43	89,04	-7,27	0,00	0,87
107	78,28	-6,99	-1,42	78,87	-6,57	-1,69	0,77	78,20	-6,55	-0,97	0,63
108	76,27	-9,39	-2,48	76,98	-8,66	-1,88	1,18	76,08	-8,35	-1,24	1,63
109	41,82	-33,66	-10,54	41,30	-34,95	-15,13	4,80	40,07	-35,25	-14,15	4,32
110	13,47	-3,55	-0,46	15,67	-2,50	-0,14	2,45	15,25	-2,69	-0,48	1,98
111	85,64	-11,02	-3,87	86,78	-11,24	-3,27	1,30	85,78	-10,67	-3,05	0,90
112	55,62	-16,3	-9,34	56,25	-16,42	-9,66	0,72	55,42	-16,73	-8,92	0,64
113	74,41	-19,23	-10,85	74,67	-19,05	-11,26	0,52	73,42	-18,53	-9,76	1,63
114	44,63	-22,33	-12,21	44,27	-23,85	-15,99	4,09	43,38	-23,86	-15,08	3,48
115	64,98	-25,34	-13,59	64,98	-26,00	-14,58	1,19	63,82	-25,84	-13,82	1,28
116	35,8	-25,91	-12,3	37,26	-25,02	-13,64	2,17	35,97	-25,34	-13,44	1,29
117	55,08	-30,07	-18,19	54,22	-32,22	-22,17	4,60	53,28	-32,28	-21,52	4,38
118	84,46	-1,29	0,51	85,21	-1,61	0,87	0,89	84,70	-1,62	1,22	0,82
119	84,05	-8,05	-5,37	84,60	-8,71	-5,55	0,88	83,77	-8,19	-5,10	0,42
120	17,55	-9,69	-8,14	18,39	-8,54	-7,96	1,44	17,26	-8,41	-7,75	1,37
121	75,09	-14,85	-13,41	74,99	-15,49	-14,48	1,25	73,82	-14,81	-13,16	1,30
122	46,22	-16,7	-16,15	46,43	-17,10	-18,57	2,46	45,59	-17,31	-17,69	1,77
123	34,65	-22,41	-17,08	37,28	-21,03	-16,94	2,98	36,13	-21,50	-16,92	1,74
124	35,92	-2,36	-3,28	36,05	-2,35	-5,74	2,47	35,22	-2,54	-5,29	2,13
125	33,28	-7,89	-10,48	33,52	-6,94	-12,78	2,50	31,28	-7,47	-13,03	3,27
126	60,78	-2,18	-2,34	62,32	-2,80	-2,12	1,68	61,92	-2,89	-1,74	1,47
127	88,07	-4,84	-4,32	88,82	-5,48	-4,00	1,04	87,95	-5,08	-3,57	0,80
128	77,27	-5,51	-7,67	77,82	-5,57	-7,50	0,58	76,85	-5,35	-6,89	0,90
129	26,12	-7,6	-10,42	23,03	-7,40	-12,16	3,55	22,22	-7,67	-12,14	4,27
130	46,5	-12,86	-19,97	47,01	-13,83	-22,37	2,64	45,41	-14,44	-22,36	3,06
131	34,35	-15,69	-23,64	36,29	-14,40	-22,56	2,57	35,46	-14,67	-22,27	2,04
132	13,95	-6,52	-9,95	14,34	-5,43	-10,92	1,51	12,95	-4,52	-10,88	2,42
133	29,14	-9,05	-17,19	29,02	-7,27	-19,85	3,20	27,22	-7,78	-20,49	4,02
134	38,61	-16,21	-32,23	39,68	-17,01	-31,73	1,43	38,18	-16,19	-31,46	0,88
135	35,55	-2,44	-8,44	35,85	-2,32	-10,06	1,65	34,53	-2,78	-9,99	1,88
136	30,16	-4,21	-17,49	30,07	-2,97	-19,91	2,72	28,56	-4,03	-20,03	3,00
137	28,41	-10,54	-27,45	29,13	-7,90	-28,72	3,02	27,12	-8,05	-29,60	3,53
138	17,22	-4,06	-20,74	16,25	-4,69	-21,22	1,26	13,12	-5,09	-23,93	5,30
139	63,15	0,23	-0,42	64,10	-0,21	-0,36	1,04	63,94	-0,66	0,18	1,33
140	45,11	0,22	-10,33	46,60	1,61	-9,72	2,13	45,52	0,76	-9,37	1,17
141	24,07	-1,35	-28,46	24,11	-0,98	-30,36	1,94	22,17	-1,52	-31,40	3,50
142	18,96	2,37	-24,13	18,40	0,42	-26,24	2,93	16,61	0,15	-27,22	4,47
143	14,08	0,48	-13,51	13,38	-2,65	-16,50	4,38	12,16	-2,60	-17,19	5,17
144	7,52	0,26	-0,42	13,17	-0,51	-0,46	5,70	12,29	0,43	-0,80	4,79
145	72,89	4,49	-16,85	73,42	4,24	-16,65	0,62	72,85	3,80	-16,07	1,04
146	25,46	8,16	-39,29	23,04	8,45	-42,90	4,36	21,25	8,06	-43,78	6,16

	Colorimetric data measured with a spectrophotometer			Simultaneous measuring and calibration				Calibration precedes measuring			
Colour	L*-ref	a*-ref	b*-ref	L*-real	a*-real	b*-real	$\Delta E^*_{ab} - \text{real}$	L*-sing	a*-sing	b*-sing	$\Delta E^*_{ab} - \text{sing}$
147	13,54	0,94	-0,58	15,28	0,05	0,39	2,18	14,44	0,17	-1,20	1,34
148	33,21	19,83	-12,82	31,61	22,05	-13,55	2,83	30,37	21,19	-14,86	3,75
149	44,52	25,98	-6,76	44,01	26,20	-7,24	0,73	42,96	24,19	-8,56	2,98

5

Table 4
Average and median of ΔE_{ab} of Examples 1-6

	Number of model parameters	Weighing	Calibration beforehand	Simulta- neous calibration	Grey balancing	ΔE_{ab} average	ΔE_{ab} median
1	4	Y	----	Y	-----	2,26	1,67
2	4	Y	Y	-----	-----	2,23	1,61
3	4	Y	----	Y	Y	2,21	1,60
4	4	Y	Y	-----	Y	2,15	1,56
5	4	-----	----	Y	-----	2,91	2,15
6	20	-----	----	Y	-----	2,32	1,74

10

Table 6
Average and median of ΔE_{ab} of Examples 7-12

	Number of model parameters	Weighing	Calibration beforehand	Simultaneous calibration	Grey balancing	ΔE_{ab} average	ΔE_{ab} median
7	4	Y	----	Y	----	2,20	2,04
8	4	Y	Y	-----	-----	2,24	2,18
9	4	Y	----	Y	Y	2,59	2,40
10	4	Y	Y	-----	Y	2,55	2,25
11	4	-----	----	Y	-----	3,12	3,22
12	20	-----	----	Y	-----	4,44	2,72

Table 5
Measuring data of Examples 7 and 8

Colour	Colorimetric data measured with a spectrophotometer			Simultaneous measuring and calibration			ΔE^*_{ab} - real	Calibration precedes measuring			ΔE^*_{ab} - sing
	L*-ref	a*-ref	b*-ref	L*-real	a*-real	b*-real		L*-sing	a*-sing	b*-sing	
1	34,21	16,65	16,48	34,23	14,77	19,33	1,60	34,23	14,77	19,33	1,60
2	33,18	15,57	23,9	34,04	14,44	24,83	2,03	34,03	14,53	24,77	2,10
3	35,72	17,79	33,24	34,39	14,77	31,50	2,35	34,38	14,77	31,43	2,41
4	32,08	21,48	17,81	31,48	19,18	20,39	1,72	31,61	19,49	20,44	1,67
5	37,03	23,94	32,59	38,29	20,06	33,84	0,31	38,34	20,24	33,99	0,46
6	33,59	33,8	18,02	31,05	29,59	16,98	5,16	30,93	30,41	17,07	4,95
7	33,58	32,06	24,65	33,61	28,99	26,61	1,26	33,76	29,18	27,19	1,08
8	34,29	37,55	33,64	35,96	35,04	36,93	1,62	35,97	35,19	37,25	1,94
9	45,51	17,17	16,13	45,80	15,32	17,25	0,60	45,80	15,44	17,13	0,57
10	50,32	14,45	24,96	51,21	9,16	26,71	2,45	51,40	9,57	26,90	2,31
11	48,99	16,91	36,51	50,31	9,76	38,19	2,75	50,38	9,80	38,15	2,71
12	50,54	25,58	16,78	52,81	22,78	19,78	2,39	52,72	22,71	19,85	2,41
13	52,96	22,31	32,5	54,30	16,16	35,87	2,05	54,36	16,21	36,05	2,16
14	45,62	32,24	17,62	45,13	28,98	18,54	2,46	45,22	29,10	18,45	2,39
15	50,63	34,07	24,3	51,79	28,81	27,34	2,90	51,95	29,53	27,21	2,21
16	51,8	37,11	36,22	53,99	32,45	41,31	2,55	54,22	33,08	41,63	2,96
17	18,88	15,9	9,19	20,03	13,39	9,41	1,28	20,14	13,72	9,38	1,16
18	29,15	20,6	24,53	29,32	17,30	27,26	1,81	29,89	17,61	27,27	1,46
19	18,05	-5,02	-15,56	15,18	-1,07	-16,41	4,63	15,16	-0,97	-16,55	4,53
20	31,51	51,33	31,58	31,74	45,45	29,20	3,13	31,55	46,96	29,31	3,76
21	26,8	24,49	19,3	26,48	23,43	21,15	1,75	26,51	23,84	21,86	2,32
22	44,94	32,01	44,81	48,16	27,24	47,26	1,69	48,35	27,55	47,82	2,05
23	25,5	9,73	17,32	25,86	7,72	15,96	1,60	25,90	7,75	16,07	1,51
24	35,52	26,71	26,01	35,96	23,77	28,12	0,84	35,94	24,31	28,40	1,30
25	43,32	8,31	32,85	42,79	2,20	32,05	1,46	42,87	2,30	31,93	1,38
26	39,47	42,54	30,09	40,36	50,78	39,66	5,41	40,49	51,04	39,63	5,65
27	47,46	20,61	24,89	47,98	16,46	26,79	1,64	47,99	16,64	26,88	1,58
28	67,01	13,65	34,47	68,44	8,92	37,58	2,29	68,36	8,83	37,57	2,20

Claims

1. Method of determining a colour formula for matching a selected colour measured with an electronic imaging device, which method comprises the following steps:
- 5
- a) an electronic imaging device is calibrated by measuring the colour signals of at least two calibration colours, the colorimetric data of each of the calibration colours being known;
- b) at the same time or in a next step the selected colour is measured with the aid of the electronic imaging device;
- 10
- c) using a mathematical model, parameters are calculated for converting the measured colour signals of the calibration colours to the known colorimetric data;
- d) using the mathematical model and the calculated parameters, the colour signals of the measured selected colour are converted to colorimetric data; and
- 15
- e) using a databank, the colour formula of which the colorimetric data most closely matches the calculated colorimetric data of the measured selected colour is determined.
- 20
2. A method according to claim 1, characterised in that the calibration colours are distributed over the entire colorimetric colour space.
3. A method according to claim 2, characterised in that the calibration colours are distributed in the vicinity of the selected colour.
- 25
4. A method according to any of claims 1-3, characterised in that the calibration colours in the vicinity of the selected colour are given greater weight when calculating the model parameters.
- 30
5. A method according to any of claims 1-3, characterised in that the electronic imaging device is a flatbed scanner.

6. A method according to one or more of preceding claims 1-3, characterised in that the electronic imaging device is a digital camera.
- 5 7. A method according to one or more of claims 1-3, characterised in that the measurement of the calibration colours and the selected colour takes place simultaneously.
- 10 8. A method according to any of claims 1-3, characterised in that texture parameters can be calculated from the recording of the selected colour and that by using a databank the colour formula can be determined of which the texture parameters most closely match the calculated texture parameters of the measured selected colour.
- 15 9. A method according to claim 8, characterised in that a ruler is provided on the calibration pattern.
- 20 10. A method of determining a texture and/or colour formula for matching a selected colour and/or texture of a selected material in which
 - a) the colour of the selected material is measured with a spectrophotometer or a tri-stimulus meter;
 - b) the texture of the selected material is measured with an electronic imaging device; and
 - c) the measured colour and texture data are used to determine, in a
- 25 databank, the texture and/or colour formula of which the colorimetric data and the texture data most closely match those of the selected material.
- 30 11. A method according to any one of claims 1-3, 9 or 10, characterised in that the method is carried out in the car repair industry.

12. A method according to any one of claims 1-3, 9 or 10, characterised in that additional information is provided during recording of the selected colour with the electronic imaging device.
- 5 13. A method of determining the colour difference of a selected colour measured with an electronic imaging device compared to a standard colour sample, which method comprises the following steps:
- 10 a) an electronic imaging device is calibrated by measuring the colour signals of at least two calibration colours, the colorimetric data of each of the calibration colours being known;
- 15 b) at the same time or in a next step the selected colour is measured with the aid of the electronic imaging device;
- c) using a mathematical model, parameters are calculated for converting the measured colour signals of the calibration colours to the known colorimetric data;
- 20 d) using the mathematical model and the calculated parameters, the colour signals of the measured selected colour are converted to colorimetric data; and
- e) the colorimetric data of the selected colour are compared to the colorimetric data of a standard colour sample.


Abstract

The invention pertains to a method of determining a colour formula for matching a selected colour measured with an electronic imaging device, which method comprises the following steps:

- a) an electronic imaging device is calibrated by measuring the colour signals of at least two calibration colours, the colorimetric data of each of the calibration colours being known;
 - b) at the same time or in a next step the selected colour is measured with the aid of the electronic imaging device;
 - c) using a mathematical model, parameters are calculated for converting the measured colour signals of the calibration colours to the known colorimetric data;
 - d) using the mathematical model and the calculated parameters, the colour signals of the measured selected colour are converted to colorimetric data; and
 - e) using a databank, the colour formula is determined of which the colorimetric data most closely matches the calculated colorimetric data of the measured selected colour.
- 20 The invention also comprises a method of determining a colour formula for matching a selected colour of textured materials such as special effect paints and to a method of determining the colour difference of a selected colour measured with an electronic imaging device compared to a standard colour sample.
- 25 The invention has the advantage that it is possible to make use of inexpensive consumer electronics. The method according to the invention also makes it possible to measure a specific attribute of the colour appearance, the so-called texture.

Figure 1

5 Calibration pattern 1

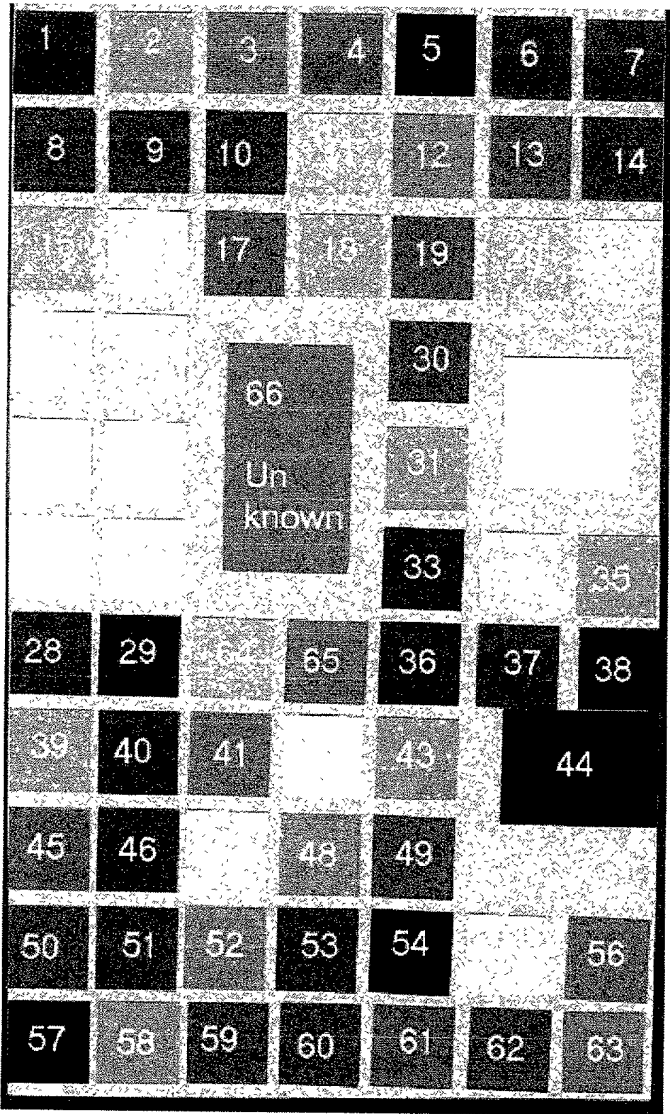


00500T"60000000

Figure 2

Calibration pattern 2

5

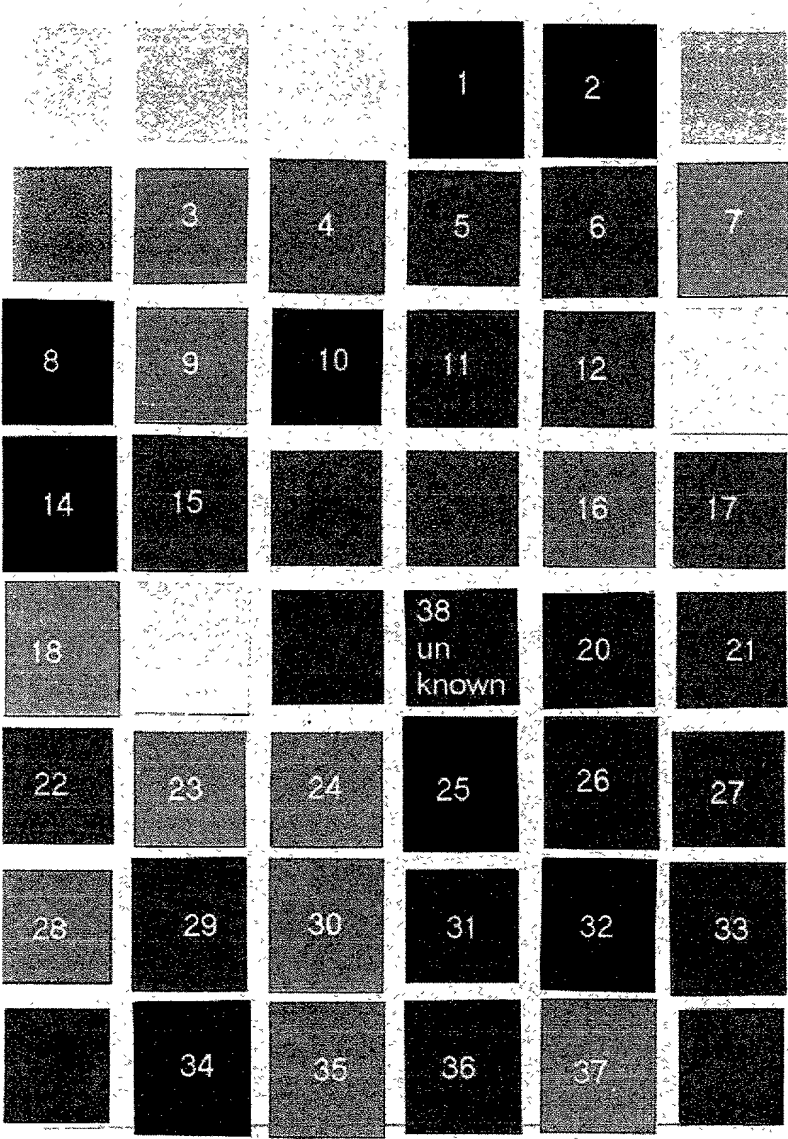

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHODS APPLYING COLOUR MEASUREMENT BY MEANS OF AN ELECTRONIC IMAGING DEVICE

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED	
Europe	99203244.1	10/5/1999	YES: X	NO:
			YES:	NO:

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL	FILING DATE

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section

112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS(patented/pend ing/abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following as my attorneys of record, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent Office:

Louis A. Morris, Reg. No. 28,100
Ralph J. Mancini, Reg. No. 34,054
Joan M. McGillicuddy, Reg. No. 35,608

Richard P. Fennelly, Reg. No. 25,677
David H. Vickrey, Reg. No. 30,697
Lainie E. Parker, Reg. No. 36,123

Send Correspondence to:

Joan M. McGillicuddy
Akzo Nobel Inc.
Intellectual Property Department
7 Livingstone Avenue
Dobbs Ferry, New York 10522-3408

Direct Telephone Calls To:

Joan M. McGillicuddy
914-674-5463

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Daniel SPITZER

Citizenship: Dutch

Residence: Leiden, Netherlands

Post Office Address: Pieterskerkhof 20, 2311 ST Leiden, Netherlands

Inventor's Signature

Date

Full Name of Inventor: Marcel Petrus LUCASSEN

Citizenship: Dutch

Residence: Amsterdam, Netherlands

Post Office Address: Witte de Withstraat 149-1, 1057 XT Amsterdam,
Netherlands

Inventor's Signature

Date